


Ceiling Absorber 40




1 Ceiling- & Wall Absorber | Acoustic Elements

Customised Acoustic Solutions

Product

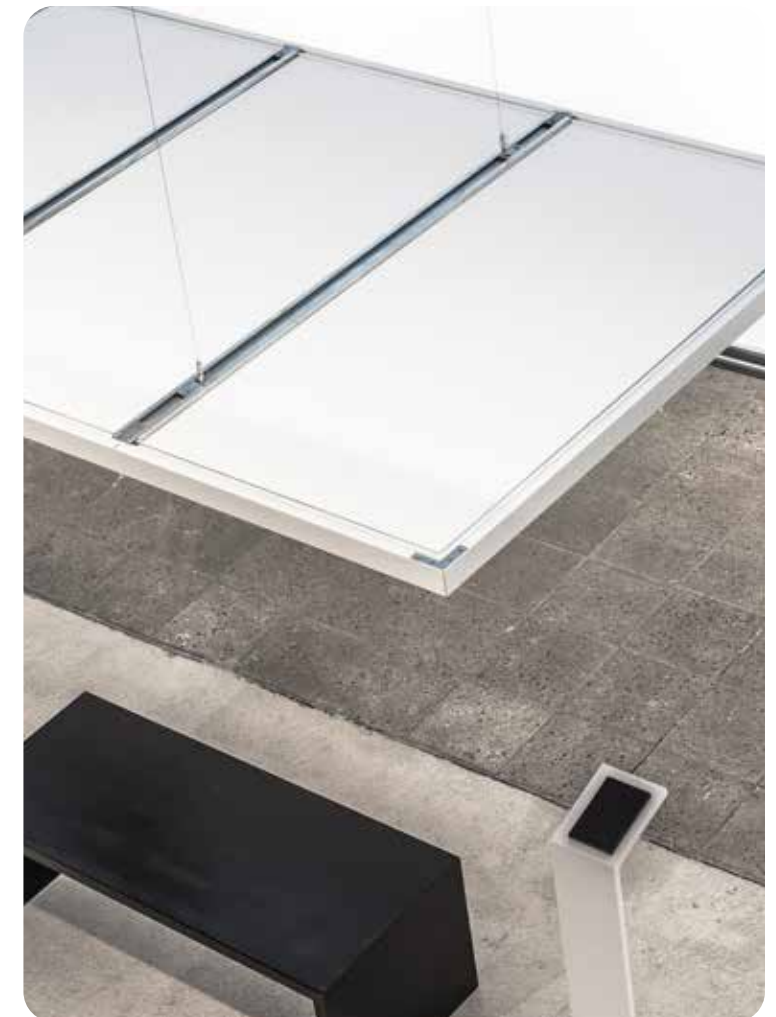

Ceiling-mounted

Ceiling-mounted
suspendedIntegrated LEDs
optional

Ceiling Absorber

Optionally with LED

The square and rectangular **ceiling absorbers** combine functional design with a high degree of acoustic quality. Whether mounted directly under the ceiling at a distance of only 20 mm or suspended at different heights using a stainless steel suspension kit, individual options are available for acoustic room planning. The all-round aluminium profile protects the sensitive absorber core and ensures high dimensional stability. Aluminium profiles on the back of the absorbers not only provide stability, but also allow quick and individual adjustment of the suspension points to the ceiling conditions.

The **ceiling absorbers** are available in a wide range of sizes from 1,000 x 1,000 mm to 1,200 x 2,500 mm. In addition to the variant in white fleece, a version in a fabric collection and optionally with powder-coated profiles is also offered. The **ceiling absorbers** are available in standard dimensions as well as in individually requested dimensions.




Room acoustics, light and lighting design merge into an overall architectural solution. Available in square and rectangular shapes, the **ceiling absorbers with LED** downlights combine simple, functional design with a high degree of acoustic and lighting quality. Acousticians can choose from different formats and a flexible suspension height starting at a distance of 100 mm from the bare ceiling. For the lighting designer, different LED downlights offer the technical and aesthetic prerequisites for an excellent lighting design.




From above: Ceiling absorber with individual connection to the supporting profiles of the industrial ceiling, suspended between lighting levels and system ceiling, in direct mounting with a construction clearance

Ceiling Absorber 40 - suspended
from 400 - 1500 mm ceiling distance

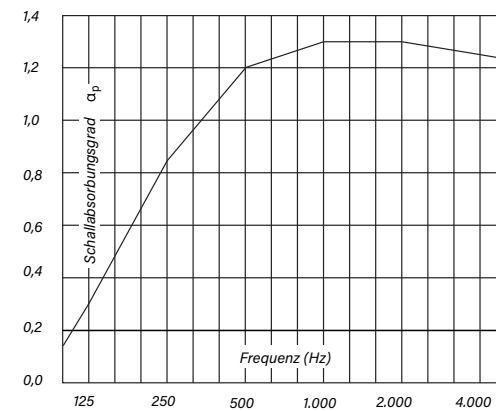


Sound absorption level -
octave centre frequency

Ceiling Absorber 40 - direct mounting
20 mm ceiling distance
with LED 60 mm ceiling distance

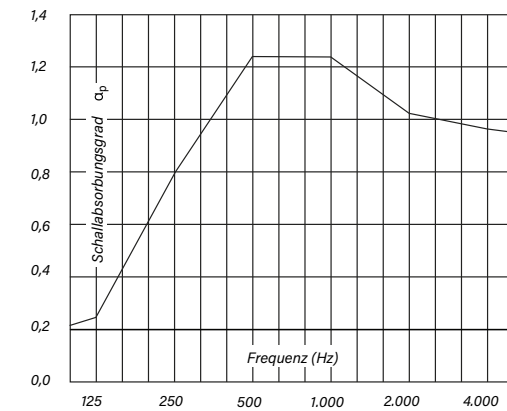

Sound absorption level -
octave centre frequency

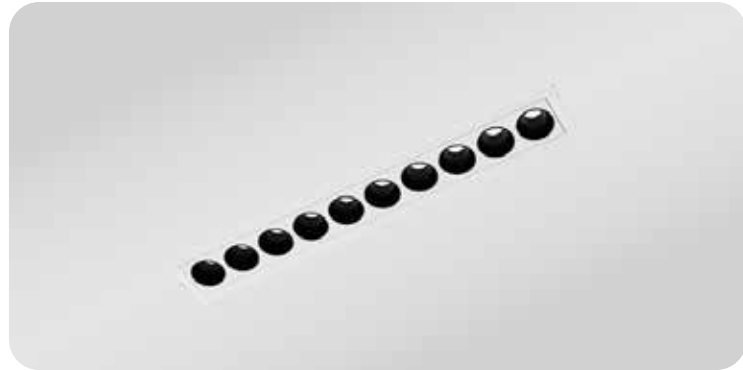


Ceiling absorber with integrated LED downlights

[Ceiling Absorber >>](#)




Ceiling Absorber 40 - suspended
400 - 1500 mm ceiling distance

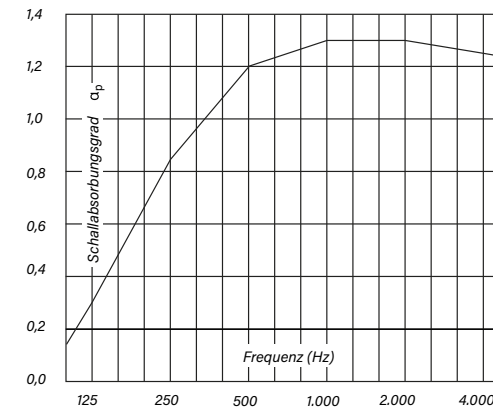

Sound absorption level -
octave centre frequency

Ceiling Absorber 40 - direct mounted 20 mm
Ceiling Absorber 40 LED - direct mounted 60 mm

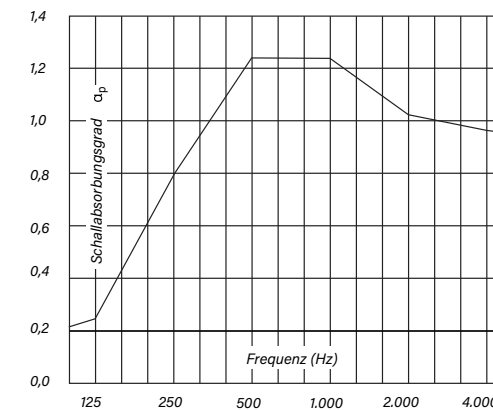

Sound absorption level -
octave centre frequency

Impressum

published by
Akustik Office Systeme GmbH
Lenabergweg 5
D-91626 Schopfloch

Editor
Henrik Behnert, AOS

Graphics / Illustration
Sabine Fleischmann, AOS

Photos
Damian Tauchert, Berlin
for AOS

except
page 3 steinprinz fotodesign, Gebr. Becker GmbH, Wuppertal
page 4 intern

@2023



Akustik Office Systeme GmbH
Lenabergweg 5
91626 Schopfloch
Germany

Phone +49 9857 97559-0

Fax +49 9857 97559-29

info@akustik-office-systeme.de

www.akustik-office-systeme.de