

Silence Point TouchDown

Silence Point is a versatile product family with the best acoustic properties, developed and optimized over many years. The modular system is broad and ranges from the classic museum bench to various sofa variants to complete work islands with or without a roof.

Seeing, hearing, feeling, when these three sensory stimuli fit together perfectly creates places full of harmony and ideal conditions for creativity. The Silence Point TouchDown models stand for much more than ergonomics, seating comfort and good acoustics. With a width 1210 mm, they are extremely space-saving. In addition to the choice of 8 fabric collections, three different design variants ensure design diversity. The lovingly fully upholstered walls are offered on one side or optionally also on both sides in a quilted version. Quilting options on request. There are 8 fabric collections with different characters and colours available for this purpose. The models are available with and without a writing tray.



*SP TouchDown tray left H1400
Without quilting, on castors*

Data Silence Point TouchDown

Wall thickness 40 mm

Substructure - dimensionally stable aluminum frame profile

Wall structure highly sound-absorbing according to DIN EN ISO 354

Filler Standard 100 by OEKO-TEX®

Walls fully upholstered with a smooth fabric surface

Seat and back upholstery always without quilting, removable cover

Feet in stainless steel, optionally powder-coated

Optional standard quilting option 114 partial. Further quilting options on request. 8 fabric collections available


Optional quilting only on the outside or outside and inside

Optional with castors



Model dependent:

Writing tray on the right or left, surface as per AOS decor card, optional Fenix black



Model overview - drawings

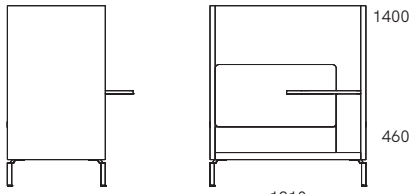


Tray right

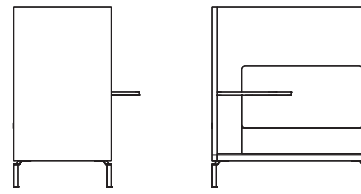

Tray left

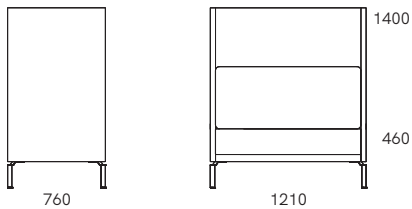

Without tray



Finish



Without quilting




One-sided outside
quilted



Quilted on both
sides

Quilting options



Quilting
114 partial

Further quilting
options on
request


Wall construction 40 mm

Sound absorption coefficient a_p per DIN EN ISO 354

125 Hz	a_p 0,21
250 Hz	a_p 0,37
500 Hz	a_p 0,60
1000 Hz	a_p 0,69
2000 Hz	a_p 0,75
4000 Hz	a_p 0,88

Rated sound absorption coefficient a_w 0,65 (H).
DIN EN ISO 354 test certificate

Models on castors



Note: Models also available with castors

Standard weight in kg

Height	1400
Version	
Standard	75
Tablar	80

Note: additional castors weight
(4 castors, 2 of which have parking brakes) + 2.5 kg