

## Free Line 40 - Partition

### Feathery-flexible with plug connection

The fully upholstered partitions with their sound-absorbing core are extremely easy to use and therefore offer the utmost flexibility for rapid rearrangement of workspaces and subdivision of rooms. Intelligent connective elements permit simple, tool-free dismantling of the partitions, while the easily attached central foot offers additional stability. Free Line – For an inspiring environment, diverse applications and optimized room acoustics. The Free Line partitions measure 1800 mm in height and 1200 mm in width. Other partition heights up to 1200 mm are also available with widths of up to 1800 mm. With a choice of 17 different fabric collections divided into five price groups, along with an extraordinary selection of structures and colour nuances up to quilted design, Free Line offers architects and planners almost limitless design possibilities. There are 10 fabric collections available as quilting fabric.

### The easy way to optimize room acoustics

The 40 mm thick partition walls are also ideal for individual positions and linear positions of any kind. For this purpose there are available medium feet in 4 sizes, matching the respective wall width. These are available, as well as the connecting elements, in two powder coatings, in anthracite gray RAL 7016 and in white aluminium RAL 9006.

---

### Daten Free Line 40 Partition

Flexible plug connection



Wall thickness 40 mm

Acoustic filling Lightweight panel

Connection elements for L, T and X connection as well as 135° and 180° linear connection

Connection elements, powder-coated

RAL 7016 anthracite gray / RAL 9006 white aluminum

Center foot, powder-coated

RAL 7016 anthracite gray / RAL 9006 white aluminum

Sound absorbing according to DIN EN ISO 354


Filler FSC certificate

Fabric covering surface

Optional organizational accessories

100% recyclable


## Detail view




X-position



Flexible plug connection  
Z-position

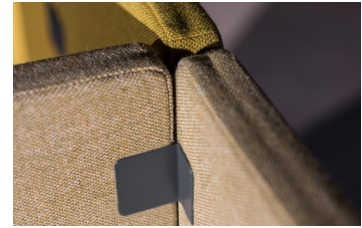

T-position

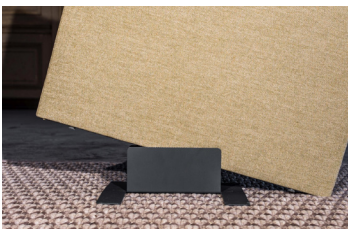

Central foot B (light version)



Flexible plug connection  
T-position



Organisational accessory

## Connecting options



linear



90°



135°



X




T-1



T-2


## Central feet - recommended wall width:



**Central foot B**  
light version up to 800 mm wall width



**Central foot S**  
up to 800 mm wall width



**Central foot L**  
up to 1200 mm wall width



**Central foot XL**  
up to 1800 mm wall width

## Free Line 40 mm

Sound absorption coefficient  $a_p$  per DIN EN ISO 354

125 Hz	$a_p$ 0,20
250 Hz	$a_p$ 0,30
500 Hz	$a_p$ 0,60
1000 Hz	$a_p$ 0,70
2000 Hz	$a_p$ 0,55
4000 Hz	$a_p$ 0,80

Rated sound absorption coefficient  $a_w$  0,55 (H)

DIN EN ISO 354 test certificate