

WallBox

Relaxed and concentrated telephoning - in an open office space - not a matter of course. With precise room acoustic planning and the use of high-performance products, open and flexible office concepts offer very good working conditions for a wide range of activities. The WallBox impress with a clear design language and good sound absorption performance. The AOS WallBox impresses with a clear, unobtrusive design language and a sound absorption performance that successfully muffles even loud conversations. The WallBox is available in a wall thickness of 40 mm. The edge design with internal fabric profiles gives the high-performance absorber walls an elegant lightness and makes it possible to play with different fabric qualities and colours.

There is a choice of 17 fabric collections - divided into 5 price groups. A plus in comfort and function is offered by the storage board fitted as standard, optionally with integrated PowerDot.



Data WallBox

Quiet Corner in open space

Wall thickness 40 mm

Inner fabric profile version

Highly sound-absorbing according to DIN EN ISO 354

Filler B1 flame retardant according to DIN 4102-1

Filler Standard 100 by OEKO-TEX®



Storage board in decor

Extensive organisation and presentation accessories, natural oak or graphite steel, magnetic

Optionally with integrated PowerDot with 1 x 220 volt and 1 x USB charger each


Optionally with an acoustic filling made of sheep's wool - 100% sustainable

Model view

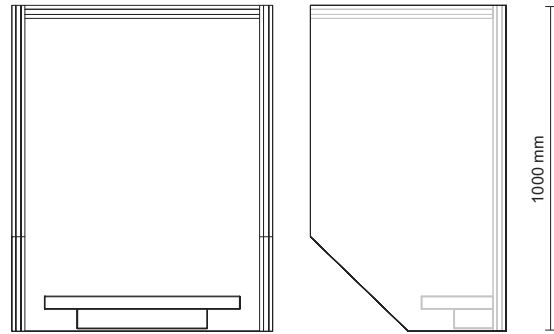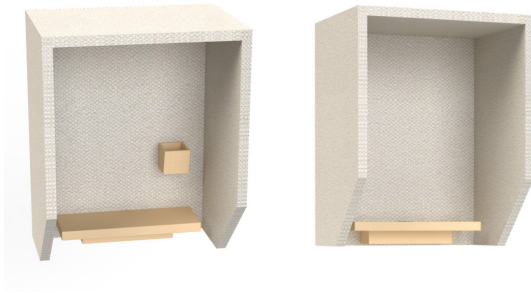


Standard – magnetic field

(placed above the storage board)



Note: Walls with magnetic substructure are supplied including 2 „Steel 25“ office magnets


Requirements: Magnets with medium holding force (up to 8 kg), diameter 25 mm required




Accessories (H x W x D)

Powder coated steel
RAL9005


Magazine board
(260x300)




Note box
(110x110x110)




Storage board S
(110x300x100)




Storage board L
(110x400x100)



Utensil box S
(110x110x110)



Utensil box L
(110x200x110)




Multi-function hook
(110x30x20)




Oak nature


Wooden utensil box S
(110x110x110)




Wooden decoration box S
(110x110x110)



Wooden utensil box L
(110x200x110)



Wooden decoration box L
(110x200x110)



Wooden multi-function hook
(50x25x25)



Magnet „Steel 25“
(diameter 25mm)

no illustration

Wall Construction 40 mm

Sound absorption coefficient a_p per DIN EN ISO 354

125 Hz	a_p 0,19
250 Hz	a_p 0,63
500 Hz	a_p 0,99
1000 Hz	a_p 1,10
2000 Hz	a_p 1,11
4000 Hz	a_p 1,02

Rated sound absorption coefficient
 a_w 0,90 (H). DIN EN ISO 354 test certificate